
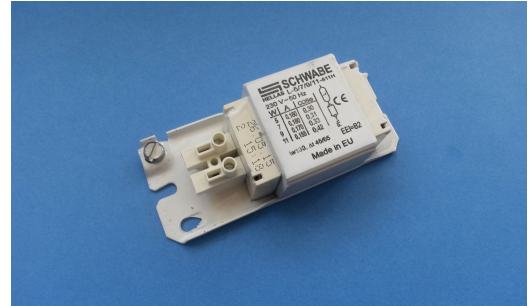


Technical Specifications for type

L5/7/9/11/230V/50Hz

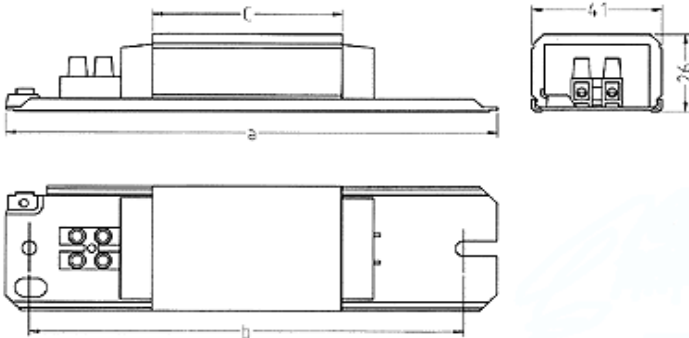

Electromagnetic Ballasts for tubular fluorescent lamps.
 EN 61347-1:2011-12, EN 61347-1:2008+A1:2011-02
 EN 60921:2005-04, EN60921:2004-12
 IEC61347-2-8 (Safety),
 IEC62384 (Working Method)

Push in terminals: 0,5-1,5 mm²
 Screw terminals: 2,5 mm²
tw 130, Protection class I
 Shape 26x41mm
 Vacuum impregnated with polyester resin



| BALLAST | | | | | | | LAMP | | | | Capacitor |
|----------------|--------|--------|--------|-------------|-------------------------------|------------|-----------|-------------|-----------|--------|----------------------|
| TYPE | V / HZ | a (mm) | b (mm) | WEIGHT (Kg) | $\Delta t/\Delta t_{an}$ (°C) | Cos ϕ | POWER (W) | CURRENT (A) | TYPE | BASE | Cop $\mu F \pm 10\%$ |
| L5/7/9/11-811H | 230/50 | 100 | 85 | 0,32 | 55/80 | 0,30 | 1X5 | 0,180 | TC-S | G23 | 2 |
| | | | | | | 0,31 | 1X7 | 0,180 | TC-S | G23 | |
| | | | | | | 0,33 | 1X9 | 0,170 | TC-S | G23 | |
| | | | | | | 0,42 | 1X11 | 0,155 | TC-S | G23 | |
| | | | | | | | | | TC-D/TC-T | G24d-1 | |