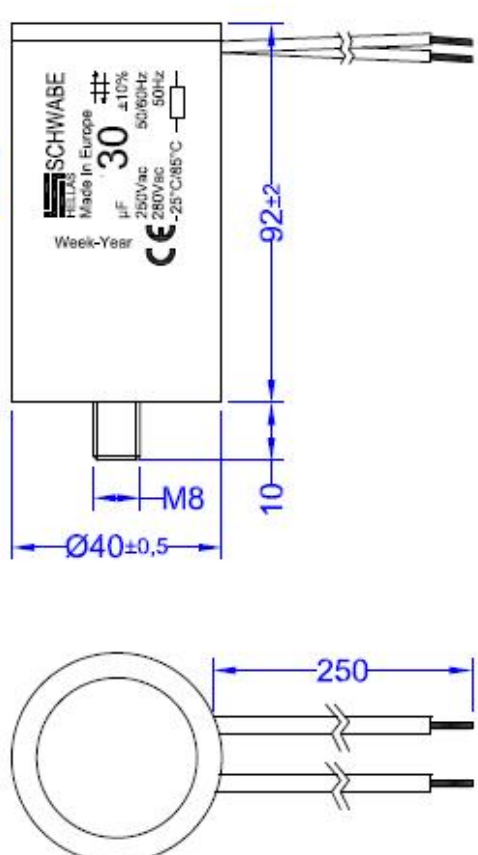


Technical Specifications Capacitors 30 μ F for Mercury, Sodium and M.H Lighting Installations

Working Voltage: 250 AC
Designed to improve the power factor

General Characteristics	Dimensions and Marking																		
<ul style="list-style-type: none"> - Case in thermoplastic material - Self-healing metallized polypropylene dielectric - Terminals made with rigid leads section 0,5 mm², PVC insulation - Embodied discharge resistance - M8 fixing stud 																			
Electrical Characteristics																			
<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">- Rated capacitance</td> <td style="padding: 2px;">: 30 μF</td> </tr> <tr> <td style="padding: 2px;">- Tolerance on capacitance</td> <td style="padding: 2px;">: $\pm 10\%$</td> </tr> <tr> <td style="padding: 2px;">- Rated frequency</td> <td style="padding: 2px;">: 50/60 Hz</td> </tr> <tr> <td style="padding: 2px;">- Operating temperature</td> <td style="padding: 2px;">: -25°C / $+85^{\circ}\text{C}$</td> </tr> <tr> <td style="padding: 2px;">- Rated voltage Un</td> <td style="padding: 2px;">: 250 Vac / 280 Vac</td> </tr> <tr> <td style="padding: 2px;">- Voltage rise/fall time (dV/dt) max.</td> <td style="padding: 2px;">: 20 V/μS</td> </tr> <tr> <td style="padding: 2px;">- Test voltage between terminals</td> <td style="padding: 2px;">: 2,0 Un 50 Hz for 2 sec.</td> </tr> <tr> <td style="padding: 2px;">- Test voltage between leads and case</td> <td style="padding: 2px;">: 2,5 KV 50 Hz for 2 sec.</td> </tr> <tr> <td style="padding: 2px;">- Safety</td> <td style="padding: 2px;">: TYPE A</td> </tr> </table>	- Rated capacitance	: 30 μ F	- Tolerance on capacitance	: $\pm 10\%$	- Rated frequency	: 50/60 Hz	- Operating temperature	: -25°C / $+85^{\circ}\text{C}$	- Rated voltage Un	: 250 Vac / 280 Vac	- Voltage rise/fall time (dV/dt) max.	: 20 V/ μ S	- Test voltage between terminals	: 2,0 Un 50 Hz for 2 sec.	- Test voltage between leads and case	: 2,5 KV 50 Hz for 2 sec.	- Safety	: TYPE A	
- Rated capacitance	: 30 μ F																		
- Tolerance on capacitance	: $\pm 10\%$																		
- Rated frequency	: 50/60 Hz																		
- Operating temperature	: -25°C / $+85^{\circ}\text{C}$																		
- Rated voltage Un	: 250 Vac / 280 Vac																		
- Voltage rise/fall time (dV/dt) max.	: 20 V/ μ S																		
- Test voltage between terminals	: 2,0 Un 50 Hz for 2 sec.																		
- Test voltage between leads and case	: 2,5 KV 50 Hz for 2 sec.																		
- Safety	: TYPE A																		
