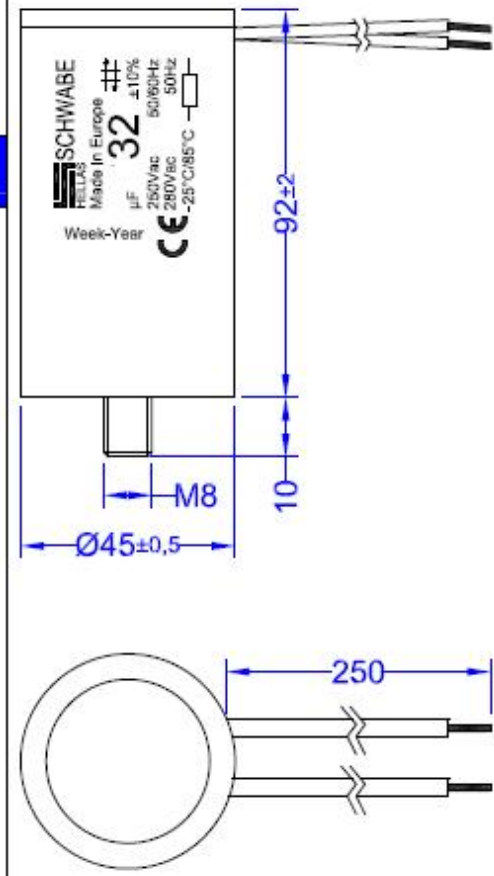


Technical Specifications Capacitors 32 μ F for Mercury, Sodium and M.H.Lighting Installations

Working Voltage: 250 AC
Designed to improve the power factor

General Characteristics	Dimensions and Marking
<ul style="list-style-type: none"> - Case in thermoplastic material - Self-healing metallized polypropylene dielectric - Terminals made with rigid leads section 0,5 mm², PVC insulation - Embodied discharge resistance - M8 fixing stud 	
Electrical Characteristics	
<ul style="list-style-type: none"> - Rated capacitance : 32 μF - Tolerance on capacitance : $\pm 10\%$ - Rated frequency : 50/60 Hz - Operating temperature : $-25^{\circ}\text{C} +85^{\circ}\text{C}$ - Rated voltage U_n : 250 Vac / 280 Vac - Voltage rise/fall time (dV/dt) max. : 20 V/μS - Test voltage between terminals : 2,0 U_n 50 Hz for 2 sec. - Test voltage between leads and case : 2,5 KV 50 Hz for 2 sec. - Safety : TYPE A 	
