


TECHNICAL SPECIFICATIONS

Electronic Ballast for T8 Lamps type 1x58W



Electronic Ballasts for
fluorescent lamps.
Protection against open circuit and lamp failure.
Voltage range: 220-240V
UN=220-240V
f=50/60Hz
U-OUT <300V
Preheating operation (Warm Start)
ISO 9001/2008
EN 61347-2-3, EN 61547, EN 55015,
EN 61000-3-2 EN 60928, EN 60929
Protection class I
EEI=A2

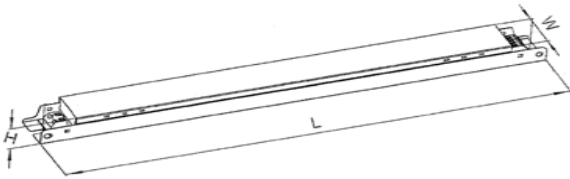

| BALLAST | | | | | | | LAMP | | |
|---------|----------------|------|------|----------|---------|------|------|--------------------|--------|
| TYPE | Dimensions/ mm | | | ta / °C | tc / °C | λ | TYPE | I _N (A) | SOCKET |
| | L | W | H | | | | | | |
| 1x58W | 300mm | 30mm | 30mm | -15+50°C | 75 °C | 0,97 | T8 | 0,26 | G13 |