
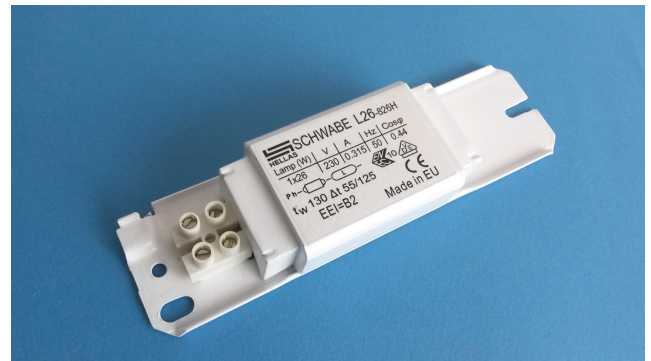


Technical Specifications for type

L26-825S/220V/60Hz

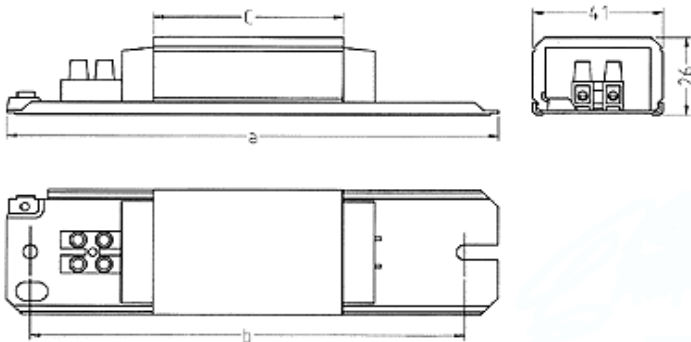

Electromagnetic Ballasts for tubular fluorescent lamps.
 EN 61347-1:2011-12, EN 61347-1:2008+A1:2011-02
 EN 60921:2005-04, EN60921:2004-12
 IEC61347-2-8 (Safety),
 IEC62384 (Working Method)
 Push in terminals: 0,5-1,5 mm²

Screw terminals: 2,5 mm²
tw 130, Protection class I
 Shape 26x41mm
 Vacuum impregnated with polyester resin



BALLAST							LAMP				Capacitor
TYPE	V / HZ	a (mm)	b (mm)	WEIGHT (Kg)	$\Delta t/\Delta t_{an}$ (°C)	Cos ϕ	POWER (W)	CURRENT (A)	TYPE	BASE	Cop $\mu F \pm 10\%$
L26-825S	220/60	155	140	0,52	50/110	0,48	1X26	0,325	TC-D TC-T	G24d-3	3,5