
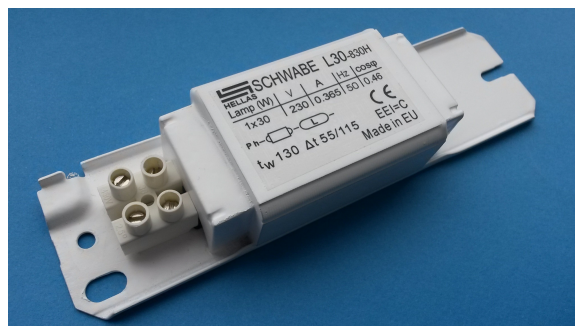


## Technical Specifications for the type

### L30-830H/230V/50Hz

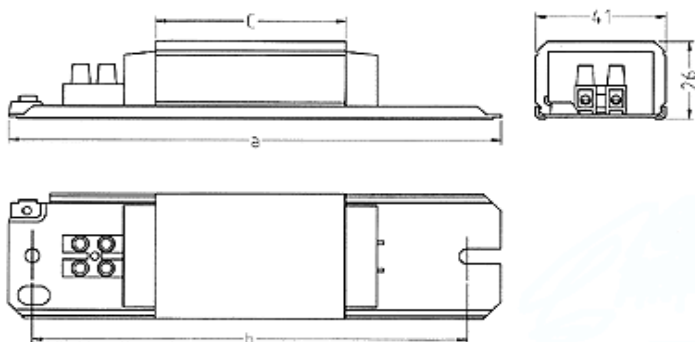

Electromagnetic Ballasts for tubular  
fluorescent lamps.  
EN 61347-1:2011-12, EN 61347-1:2008+A1:2011-02  
EN 60921:2005-04, EN60921:2004-12  
IEC61347-2-8 (Safety),  
IEC62384 (Working Method)

Push in terminals: 0,5-1,5 mm<sup>2</sup>  
Screw terminals: 2,5 mm<sup>2</sup>  
**tw 130**, Protection class I  
Shape 26x41mm  
Vacuum impregnated with polyester resin



BALLAST							LAMP				Capacitor
TYPE	V / HZ	a (mm)	b (mm)	WEIGHT (Kg)	$\Delta t/\Delta t_{an}$ (°C)	Cos $\phi$	POWER (W)	CURRENT (A)	TYPE	BASE	Cop $\mu F \pm 10\%$
L30-830H	230/50	155	140	0,52	55/115	0,46	1X30	0,365	T8	G13	4,5