
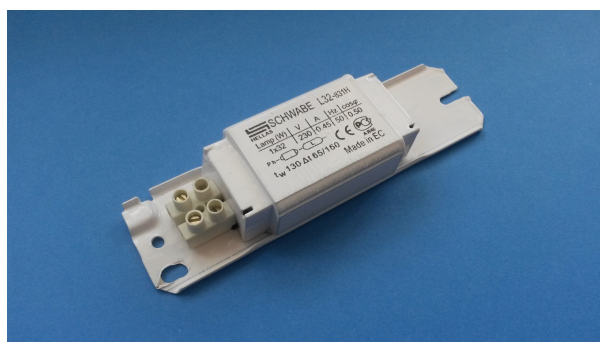


Technical Specifications for the type

L32-831H/230V/50Hz

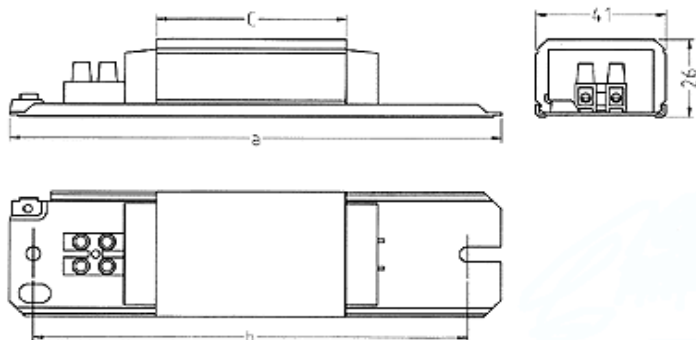

Electromagnetic Ballasts for tubular
fluorescent lamps.
EN 61347-1:2011-12, EN 61347-1:2008+A1:2011-02
EN 60921:2005-04, EN60921:2004-12
IEC61347-2-8 (Safety),
IEC62384 (Working Method)
Push in terminals: 0,5-1,5 mm²

Screw terminals: 2,5 mm²
tw 130, Protection class I
Shape 26x41mm
Vacuum impregnated with polyester resin



BALLAST							LAMP				Capacitor
TYPE	V / HZ	a (mm)	b (mm)	WEIGHT (Kg)	$\Delta t/\Delta t_{an}$ (°C)	Cos ϕ	POWER (W)	CURRENT (A)	TYPE	BASE	Cop $\mu F \pm 10\%$
L32-831H	230/50	155	140	0,52	65/160	0,5	1X32	0,45	T8/T-R	G10	4,5