


Technical Specifications for the type

L36-802H/230V/50Hz

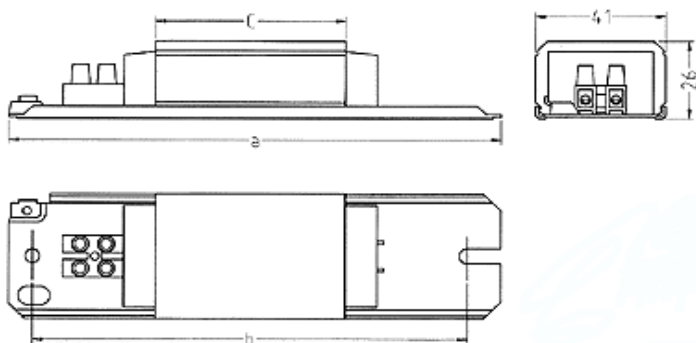

Electromagnetic Ballasts for tubular fluorescent lamps.

EN 61347-1:2011-12, EN 61347-1:2008+A1:2011-02

EN 60921:2005-04, EN60921:2004-12

IEC61347-2-8 (Safety),

IEC62384 (Working Method)

Push in terminals: 0,5-1,5 mm²

Screw terminals: 2,5 mm²

tw 130, Protection class I

Shape 26x41mm

Vacuum impregnated with polyester resin



| BALLAST | | | | | | | LAMP | | | | Capacitor |
|----------|--------|--------|--------|-------------|--------------|------|-----------|-------------|--------------------|------|------------|
| TYPE | V / HZ | a (mm) | b (mm) | WEIGHT (Kg) | Δt/Δtan (°C) | Cosφ | POWER (W) | CURRENT (A) | TYPE | BASE | Cop μF±10% |
| L36-802H | 230/50 | 155 | 140 | 0,52 | 65/170 | 0,5 | 1X36 | 0,43 | T8 TC-F TC-L | G13 | 4,5 |