


## Technical Specifications for the type

### L36-843H.B2/230V/50Hz

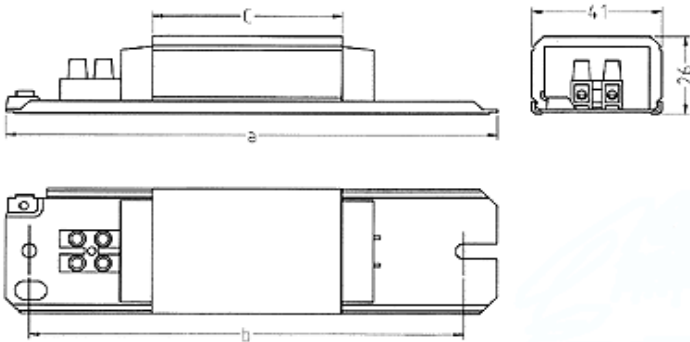

Electromagnetic Ballasts for tubular fluorescent lamps.

EN 61347-1:2011-12, EN 61347-1:2008+A1:2011-02

EN 60921:2005-04, EN60921:2004-12

IEC61347-2-8 (Safety),

IEC62384 (Working Method)

Push in terminals: 0,5-1,5 mm<sup>2</sup>

Screw terminals: 2,5 mm<sup>2</sup>

tw 130, Protection class I

Shape 26x41mm

Vacuum impregnated with polyester resin



BALLAST							LAMP				Capacitor
TYPE	V / HZ	a (mm)	b (mm)	WEIGHT (Kg)	Δt/Δtan (°C)	Cosφ	POWER (W)	CURRENT (A)	TYPE	BASE	Cop μF±10%
L36-843H.B2	230/50	155	140	0,6	55/155	0,5	2X18 1X36	0,43	T8 TC-F TC-L	G13	4,5