


Technical Specifications for the type

L40-842H/220V/50Hz

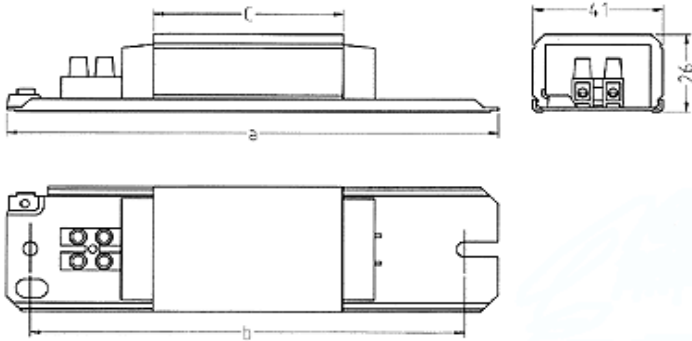

Electromagnetic Ballasts for tubular fluorescent lamps.

EN 61347-1:2011-12, EN 61347-1:2008+A1:2011-02

EN 60921:2005-04, EN60921:2004-12

IEC61347-2-8 (Safety),

IEC62384 (Working Method)

Push in terminals: 0,5-1,5 mm²

Screw terminals: 2,5 mm²

tw 130, Protection class I

Shape 26x41mm

Vacuum impregnated with polyester resin



BALLAST							LAMP				Capacitor
TYPE	V / HZ	a (mm)	b (mm)	WEIGHT (Kg)	Δt/Δtan (°C)	Cosφ	POWER (W)	CURRENT (A)	TYPE	BASE	Cop μF±10%
L40-842H	220/50	155	140	0,52	60/160	0,55	1X40	0,43	T12	G13	4,5
							1X38		T-U		
							2X20		T-R TC-DD T12		