


## Technical Specifications for the type

### L40-844H/240V/50Hz

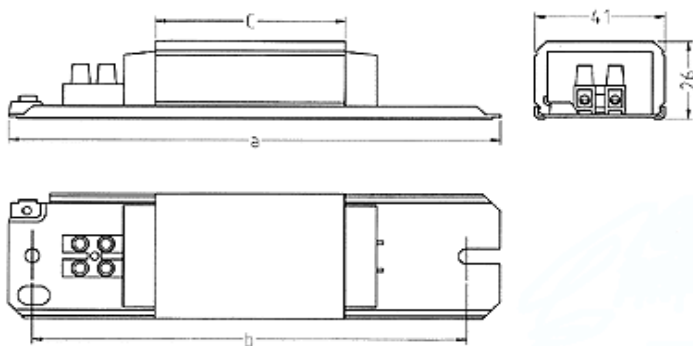

Electromagnetic Ballasts for tubular fluorescent lamps.  
 EN 61347-1:2011-12, EN 61347-1:2008+A1:2011-02  
 EN 60921:2005-04, EN60921:2004-12  
 IEC61347-2-8 (Safety),  
 IEC62384 (Working Method)  
 Push in terminals: 0,5-1,5 mm<sup>2</sup>

Screw terminals: 2,5 mm<sup>2</sup>  
**tw 130**, Protection class I  
 Shape 26x41mm  
 Vacuum impregnated with polyester resin



BALLAST							LAMP				Capacitor
TYPE	V / HZ	a (mm)	b (mm)	WEIGHT (Kg)	Δt/Δtan (°C)	Cosφ	POWER (W)	CURRENT (A)	TYPE	BASE	Cop μF±10%
L40-844H	240/50	155	140	0,52	55/155	0,5	2X18 1X40W	0,43	T8 T12/T-U T-R	G13	4,5