


Technical Specifications for the type

L65-862H/220V/50Hz

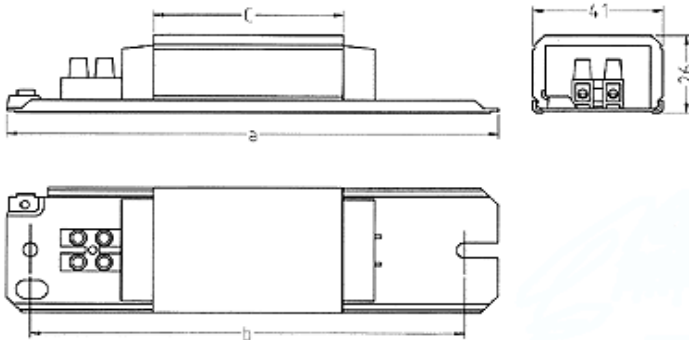

Electromagnetic Ballasts for tubular
fluorescent lamps.

EN 61347-1:2011-12, EN 61347-1:2008+A1:2011-02

EN 60921:2005-04, EN60921:2004-12

IEC61347-2-8 (Safety),

IEC62384 (Working Method)

Push in terminals: 0,5-1,5 mm²

Screw terminals: 2,5 mm²

tw 130, Protection class I

Shape 26x41mm

Vacuum impregnated with polyester resin



BALLAST							LAMP				Capacitor
TYPE	V / HZ	a (mm)	b (mm)	WEIGHT (Kg)	$\Delta t/\Delta \tan$ (°C)	Cos ϕ	POWER (W)	CURRENT (A)	TYPE	BASE	Cop $\mu F \pm 10\%$
L65-862H	220/50	195	180	0,85	60/170	0,49	1X65	0,67	T8 T-U	G13	7,0