

## TECHNICAL SPECIFICATIONS For type Q1000-407.7/220V/50HZ

Electromagnetic Ballasts for High Pressure Mercury lamps.

Shape 92x102mm

Vacuum impregnated with polyester resin



Screw terminals: 2,5 mm<sup>2</sup>

tw **130**, Protection class I

EN 61347:2008+A1:2011, EN 61347-2-9:2001+A1:2003+A2:2006 , EN 60923:2005+A1:2006

IEC 61347, IEC 62384

ISO 9001/2008

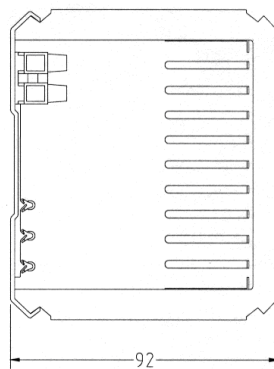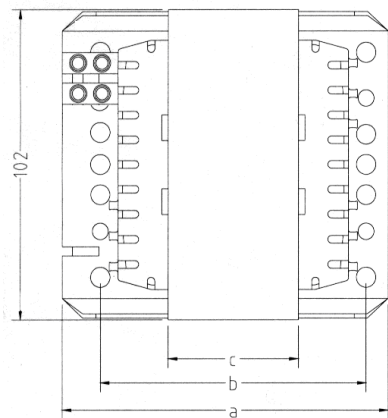

### Ballasts for High Pressure Mercury Lamps (220/50Hz)

BALLAST	LAMP		Nominal Current	Cos φ	TEMPERATURE		DIMENSIONS	
	TYPE	POWER			tw	Δt	A	B
Q 1000-407.7	HM	1000W	7,5A	0,64	130°C	70	173mm	160mm