

TECHNICAL SPECIFICATIONS For type Q1000-437.7/220V/60HZ

Electromagnetic Ballasts for High Pressure Mercury lamps.

Shape 92x102mm

Vacuum impregnated with polyester resin



Screw terminals: 2,5 mm²

tw **130**, Protection class I

EN 61347:2008+A1:2011, EN 61347-2-9:2001+A1:2003+A2:2006 , EN 60923:2005+A1:2006

IEC 61347, IEC 62384

ISO 9001/2008

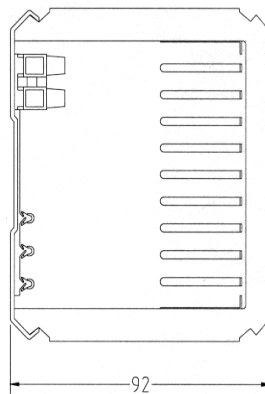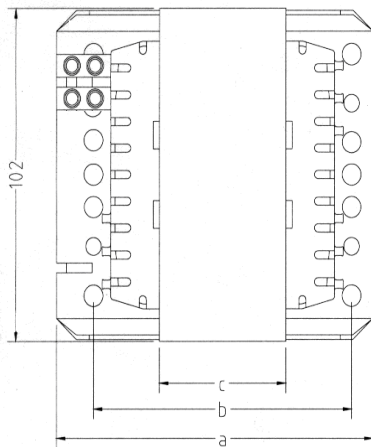

Ballasts for High Pressure Mercury Lamps (220V/60Hz)

BALLAST	LAMP		Nominal Current	Cos φ	TEMPERATURE		DIMENSIONS	
	TYPE	POWER			tw	Δt	A	B
Q 1000-437.7	HM	1000W	7,5A	0,63	130°C	70	173mm	160mm