

TECHNICAL SPECIFICATIONS For type Q 250-414.1 /230V/50Hz

Electromagnetic Ballasts for High Pressure Mercury lamps.

Shape 92x102mm

Vacuum impregnated with polyester resin


Screw terminals: 2,5 mm²

tw 130, Protection class I

EN 61347:2008+A1:2011, EN 61347-2-9:2001+A1:2003+A2:2006 , EN 60923:2005+A1:2006

IEC 61347, IEC 62384

ISO 9001/2008

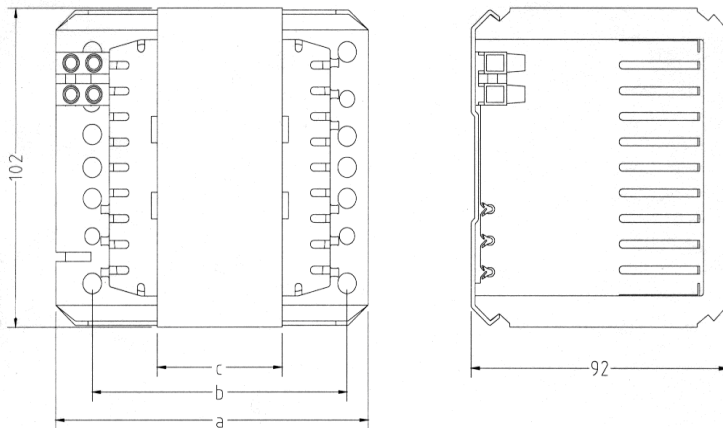

Ballasts for High Pressure Mercury Lamps (230V/50Hz)

| BALLAST | LAMP | | Nominal Current | Cos φ | TEMPERATURE | | DIMENSIONS | |
|-------------|------|-------|-----------------|-------|-------------|----|------------|------|
| | TYPE | POWER | | | tw | Δt | A | B |
| Q 250-414.1 | HM | 250W | 2,13A | 0,54 | 130°C | 65 | 105mm | 70mm |