


TECHNICAL SPECIFICATIONS

Electromagnetic Ballasts for High Pressure Mercury lamps.

Shape 52x66mm
 Vacuum impregnated with polyester resin
 Screw terminals: 2,5 mm²
tw 130, Protection class I
 EN 61347:2008+A1:2011,
 EN 61347-2-9:2001+A1:2003+A2:2006 ,
 EN 60923:2005+A1:2006
 IEC 61347, IEC 62384
 ISO 9001/2008

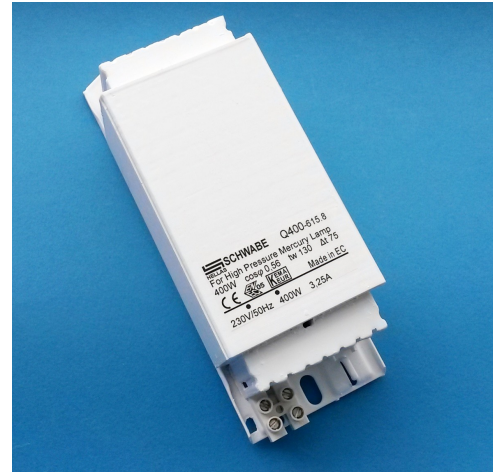

Ballasts for High Pressure Mercury Vapour Lamps (230V/50Hz)

| BALLAST | LAMP | | Nominal Current | Cos φ | TEMPERATURE | | DIMENSIONS | |
|------------|------|-------|-----------------|-------|-------------|----|------------|-------|
| | TYPE | POWER | | | tw | Δt | A | B |
| Q400-615.8 | HM | 400W | 3.25A | 0,56 | 130°C | 75 | 180mm | 155mm |

