



Technical Specifications

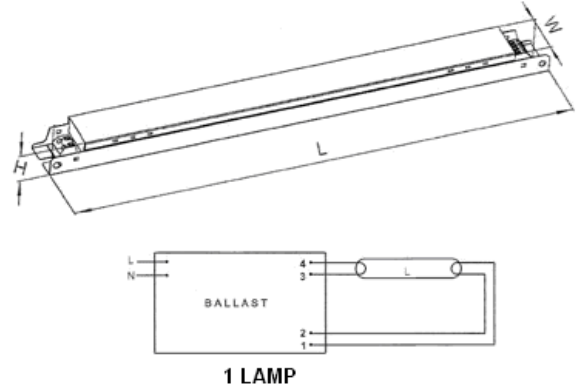

Electronic Ballasts for tubular T5
fluorescent lamps.
Protection against open circuit and lamp failure.
EEI=A2
Frequency : 50/60 Hz
Preheat Start

EN 61347-2-3, EN 61547, EN 55015,
EN 61000-3-2 EN 60925, EN 60929
Protection class I
*Suitable for Emergency Installation acc.to VDE 0108

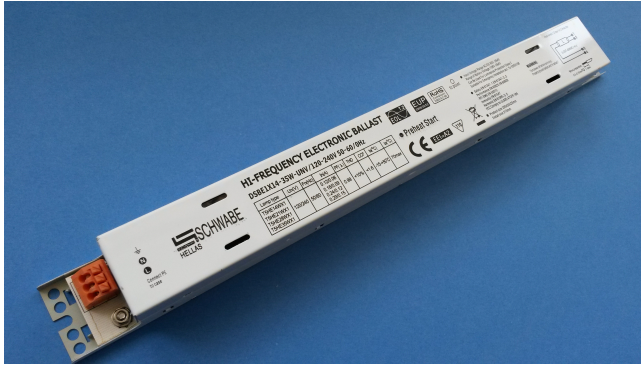

| BALLAS | | | | | | | | | LAMP | | |
|----------|----------------|------|------|--|---------|-----------|------|---------------|------|------------------------------|--------|
| Type | Dimensions/ mm | | | In (A) | tc / °C | ta / °C | λ | Voltage Range | Type | Power W | Socket |
| | L | W | H | | | | | | | | |
| 1X14-35W | 300mm | 30mm | 30mm | 0.12/ 0.06 0.18/ 0.09 0.24/ 0.12 0.29/ 0.15 | 70 | -15 +50°C | 0.99 | 120-240V | T5 | 1X14 1X21 1X28 1X35 | G5 |