



TECHNICAL SPECIFICATIONS

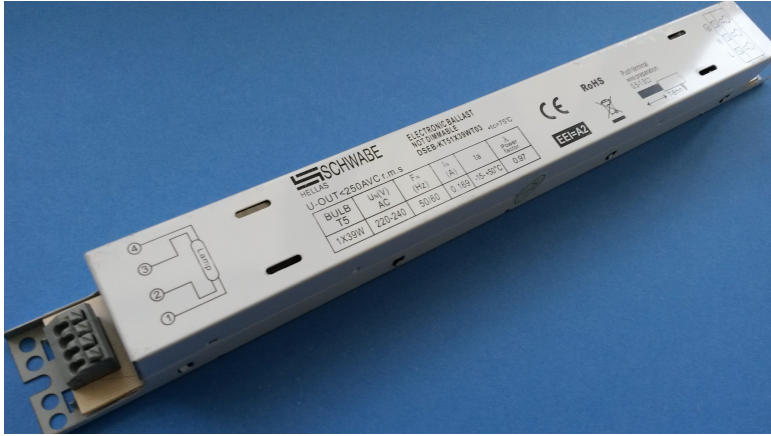

Electronic Ballasts for fluorescent lamps.
 Protection against open circuit and lamp failure.
 Voltage range: 220-240V
 UN=220-240V
 f=50/60Hz
 U-OUT <300V
 Preheating operation (Warm Start)
 ISO 9001/2008
 EN 61347-2-3, EN 61547, EN 55015,
 EN 61000-3-2 EN 60928, EN 60929
 Protection class I
 EEI=A2



BALLAST							LAMP		
TYPE	Dimensions/ mm			ta / °C	tc / °C	λ	TYPE	I _N (A)	SOCKET
	L	W	H						
1x39W	300mm	30mm	30mm	-15+50°C	75 °C	0,97	T5	0,17	G13