


TECHNICAL SPECIFICATIONS

Electronic Ballast for Fluorescent Lamps

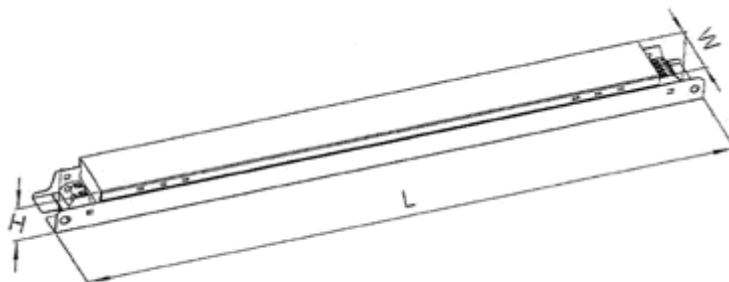

Electronic Ballasts for
fluorescent lamps.
Protection against open circuit and lamp failure.
Voltage range: 220-240V
UN=220-240V
f=50/60Hz
U-OUT <math>< 300V</math>
Preheating operation (Warm Start)

ISO 9001/2008
EN 61347-2-3, EN 61547, EN 55015,
EN 61000-3-2 EN 60928, EN 60929
Protection class I
EEI=A2



BALLAST							LAMP	
Type	Dimensions/ mm			ta / °C	tc / °C	λ	Type	I _N (A)
	L	W	H					
2x49	340mm	30mm	30mm	-15+50°C	85 °C	0,97	T5	0,50