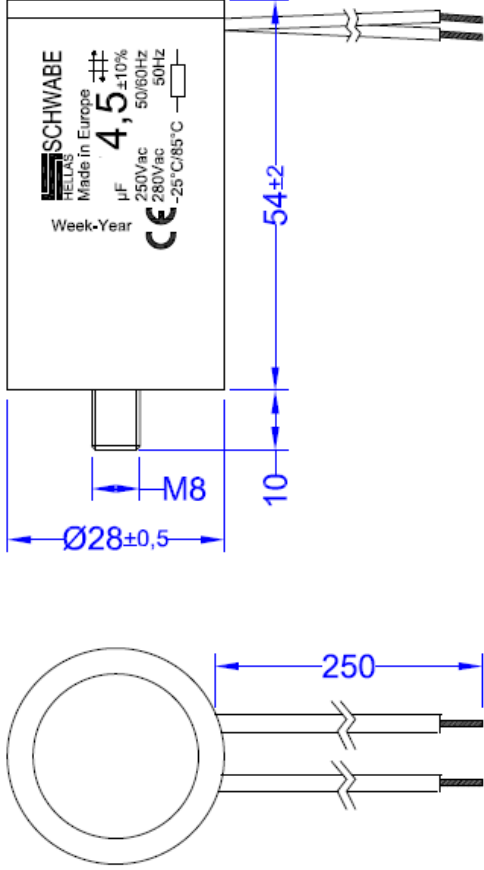


## Technical Specifications For Capacitor 4,5 $\mu$ F

Working Voltage: 250 AC  
Designed to improve the power factor

General Characteristics	Dimensions and Marking
<ul style="list-style-type: none"> <li>- Case in thermoplastic material</li> <li>- Self-healing metallized polypropylene dielectric</li> <li>- Terminals made with rigid leads section 0,5 mm<sup>2</sup>, PVC insulation</li> <li>- Embodied discharge resistance</li> <li>- M8 fixing stud</li> </ul>	
Electrical Characteristics	
<ul style="list-style-type: none"> <li>- Rated capacitance : 4,5 <math>\mu</math>F</li> <li>- Tolerance on capacitance : <math>\pm 10\%</math></li> <li>- Rated frequency : 50/60 Hz</li> <li>- Operating temperature : -25°C +85°C</li> <li>- Rated voltage Un : 250 Vac / 280 Vac</li> <li>- Voltage rise/fall time (dV/dt) max. : 30 V/<math>\mu</math>S</li> <li>- Test voltage between terminals : 2,0 Un 50 Hz for 2 sec.</li> <li>- Test voltage between leads and case : 2,5 KV 50 Hz for 2 sec.</li> <li>- Safety : TYPE A</li> </ul>	