
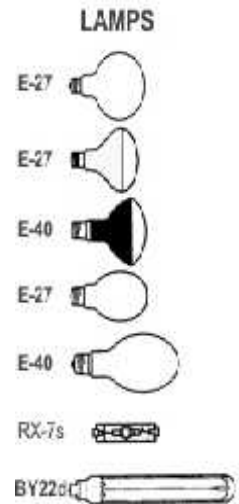


ELECTRONIC IGNITORS FOR DISCHARGE LAMPS 70-400W

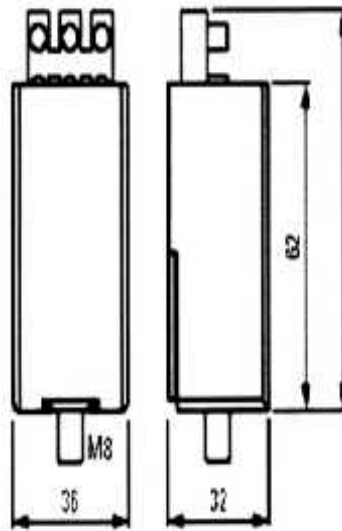

<u>TECHNICAL DATA</u>	<u>IGNITOR 70- 400W</u>	<u>LAMPS</u>
Approved mains voltage [V]	198...264	HST-DE 70 W Super
Approved mains frequency [Hz]	50/60	HS 100 W
Max. continuous lamp current [A]	4.6	HS 150 W
Connecting terminal [mm ²]	2.5	HS 250 W
Response / cut out voltage [V]	98 / 170	HS 400 W
Ignition voltage [kV]	4,0...5,0	HI 70 W
Timer ignition time [s]		HI 150 W
Phase position [°el]	60...90/240...270	HI 250 W
Pulses per cycle	60	HI 400 W
Approved load capacity [pF]	20...100	CDM-T 35 W (PHILIPS)
Internal losses at 25°C ambient temperature [W]	<3,0 (4,6A)	CDM-T 70 W (PHILIPS)
Temperature rise at 25°C ambient temperature [K]	<32 (4,6A)	CDM-T 150 W (PHILIPS)
Max. housing temperature [°C]	105	
Approved ambient temp. t(u) [°C]	-30...+70	
Weight [kg]	0.15	