


Technical Specifications for type

L18W/240V/50Hz

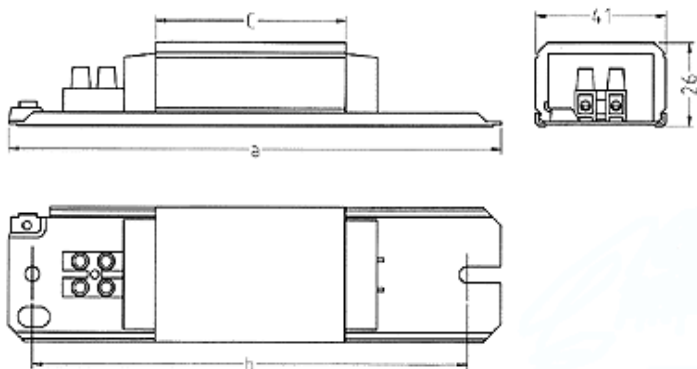

Electromagnetic Ballasts for tubular fluorescent lamps.

EN 61347-1:2011-12, EN 61347-1:2008+A1:2011-02

EN 60921:2005-04, EN60921:2004-12

IEC61347-2-8 (Safety),

IEC62384 (Working Method)

Push in terminals: 0,5-1,5 mm²

Screw terminals: 2,5 mm²

tw 130, Protection class I

Shape 26x41mm

Vacuum impregnated with polyester resin



| BALLAST | | | | | | | LAMP | | | | Capacitor |
|----------|--------|--------|--------|-------------|-------------------------------|------------|-----------|-------------|--------------|--------|----------------------|
| TYPE | V / HZ | a (mm) | b (mm) | WEIGHT (Kg) | $\Delta t/\Delta t_{an}$ (°C) | $\cos\phi$ | POWER (W) | CURRENT (A) | TYPE | BASE | Cop $\mu F \pm 10\%$ |
| L18-878H | 240/50 | 100 | 85 | 0,32 | 65/175 | 0,43 | 1X18 | 0,22 | TC-D TC-T | G24d-2 | 2 |