


Technical Specifications for the type

L58-862H/220V/50Hz

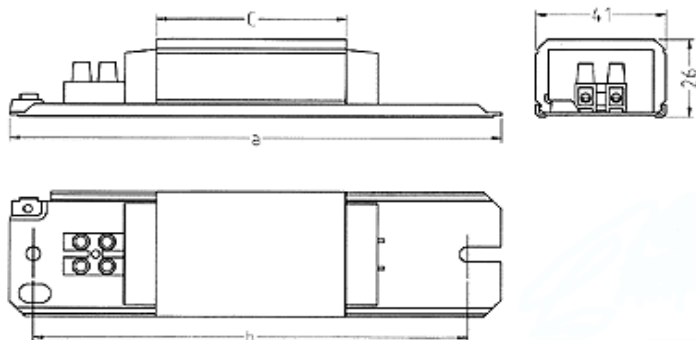

Electromagnetic Ballasts for tubular
fluorescent lamps.

EN 61347-1:2011-12, EN 61347-1:2008+A1:2011-02

EN 60921:2005-04, EN60921:2004-12

IEC61347-2-8 (Safety),

IEC62384 (Working Method)

Push in terminals: 0,5-1,5 mm²

Screw terminals: 2,5 mm²

tw 130, Protection class I

Shape 26x41mm

Vacuum impregnated with polyester resin



| BALLAST | | | | | | | LAMP | | | | Capacitor |
|----------|--------|-----------|-----------|----------------|--------------------------------|------------|--------------|----------------|------|------|-------------------------|
| TYPE | V / HZ | a (mm) | b (mm) | WEIGHT (Kg) | $\Delta t/\Delta \tan$ (°C) | Cos ϕ | POWER (W) | CURRENT (A) | TYPE | BASE | Cop $\mu F \pm 10\%$ |
| L58-862H | 220/50 | 195 | 180 | 0,85 | 60/170 | 0,49 | 1X58 | 0,67 | T8 | G13 | 7,0 |