

TECHNICAL SPECIFICATIONS

For type Q 250-434.1 /220V/60Hz

Electromagnetic Ballasts for High Pressure Mercury lamps.

Shape 92x102mm

Vacuum impregnated with polyester resin



Screw terminals: 2,5 mm²

tw 130, Protection class I

EN 61347:2008+A1:2011, EN 61347-2-9:2001+A1:2003+A2:2006 , EN 60923:2005+A1:2006

IEC 61347, IEC 62384

ISO 9001/2008

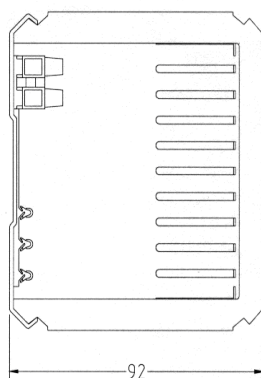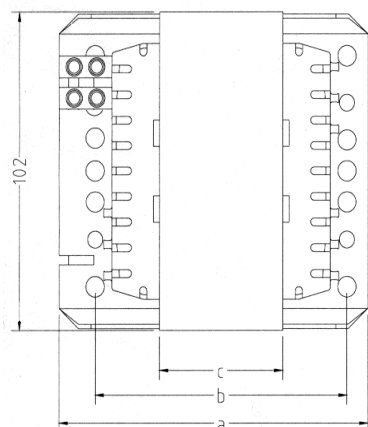

Ballasts for High Pressure Mercury Lamps (220V/60Hz)

BALLAST	LAMP		Nominal Current	Cos φ	TEMPERATURE		DIMENSIONS	
	TYPE	POWER			tw	Δt	A	B
Q 250-434.1	HM	250W	2,13A	0,57	130°C	65	105mm	70mm