



## TECHNICAL SPECIFICATIONS

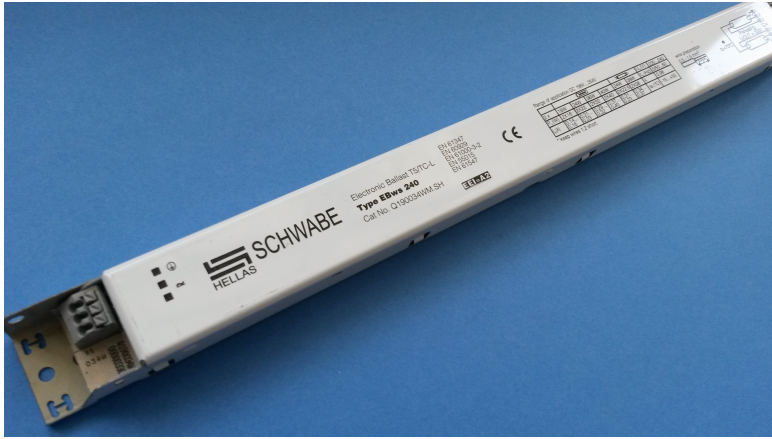

Electronic Ballasts for fluorescent lamps.  
 Protection against open circuit and lamp failure.  
 Voltage range: 220-240V  
 UN=220-240V  
 f=50/60Hz  
 U-OUT <300V  
 Preheating operation (Warm Start)  
 ISO 9001/2008  
 EN 61347-2-3, EN 61547, EN 55015,  
 EN 61000-3-2 EN 60928, EN 60929  
 Protection class I  
 EEI=A2



BALLAST							LAMP		
TYPE	Dimensions/ mm			ta / °C	tc / °C	λ	TYPE	I <sub>N</sub> (A)	SOCKET
	L	W	H						
2x39W	360mm	30mm	20mm	-15+55°C	70 °C	0,98	T5	0,34-0,37	G13