
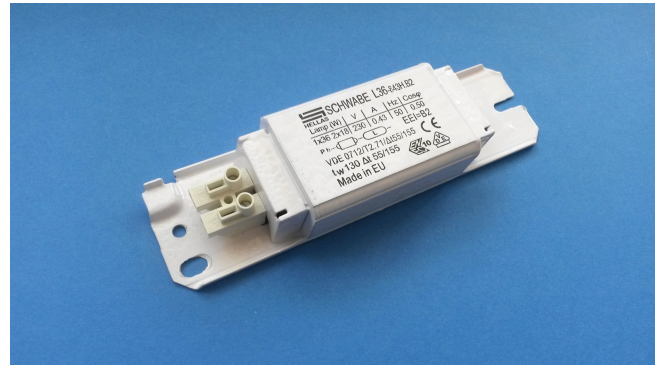


## Technical Specifications for the type

### L36-842H/220V/50Hz

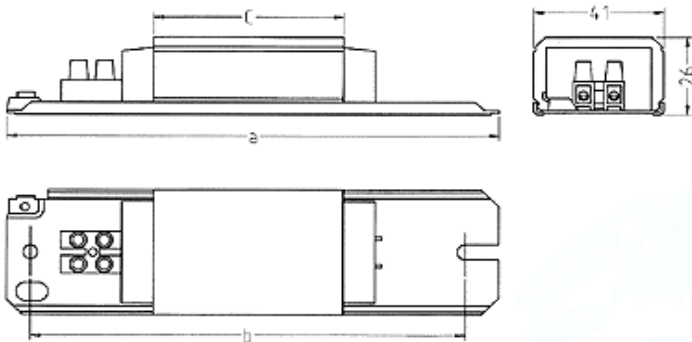

Electromagnetic Ballasts for tubular fluorescent lamps.

EN 61347-1:2011-12, EN 61347-1:2008+A1:2011-02

EN 60921:2005-04, EN60921:2004-12

IEC61347-2-8 (Safety),

IEC62384 (Working Method)

Push in terminals: 0,5-1,5 mm<sup>2</sup>

Screw terminals: 2,5 mm<sup>2</sup>

**tw 130**, Protection class I

Shape 26x41mm

Vacuum impregnated with polyester resin



B A L L A S T							L A M P				Capacitor
TYPE	V / HZ	a (mm)	b (mm)	WEIGHT (Kg)	$\Delta t / \Delta t_{an}$ (°C)	Cos $\phi$	POWER (W)	CURRENT (A)	TYPE	BASE	Cop $\mu F \pm 10\%$
L36-842H	220/50	155	140	0,52	60/160	0,55	1X36	0,43	T8/TC-F	G13	4,5
							2X18		TC-R T8		