


## Technical Specifications for the type

### L58-863H.B2/230V/50Hz

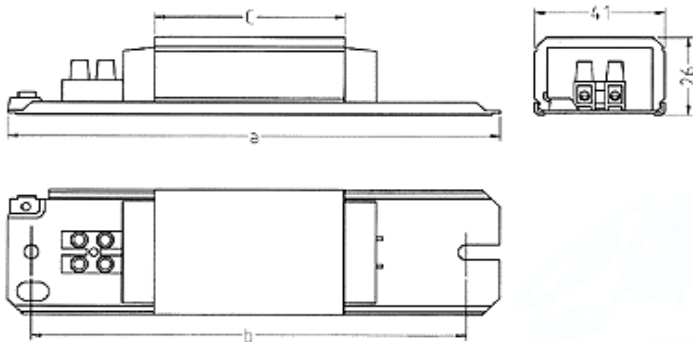

Electromagnetic Ballasts for tubular fluorescent lamps.

EN 61347-1:2011-12, EN 61347-1:2008+A1:2011-02

EN 60921:2005-04, EN60921:2004-12

IEC61347-2-8 (Safety),

IEC62384 (Working Method)

Push in terminals: 0,5-1,5 mm<sup>2</sup>

Screw terminals: 2,5 mm<sup>2</sup>

**tw 130**, Protection class I

Shape 26x41mm

Vacuum impregnated with polyester resin



BALLAST							LAMP				Capacitor
TYPE	V / HZ	a (mm)	b (mm)	WEIGHT (Kg)	$\Delta t/\Delta t_{an}$ (°C)	Cos $\phi$	POWER (W)	CURRENT (A)	TYPE	BASE	Cop $\mu F \pm 10\%$
L58-863H.B2	230/50	195	180	1,08	45/140	0,49	1X58	0,67	T8	G13	7,0